

Impact-E 400







Features

The Impact-E 400 is a compact, low power embedded system, utilising Intel® 3rd Generation mobile iCore™ processing technology

Key features:-

- Low power consumption
- High end processing power
- Compact custom design
- 4 slot expansion system

Dimensions

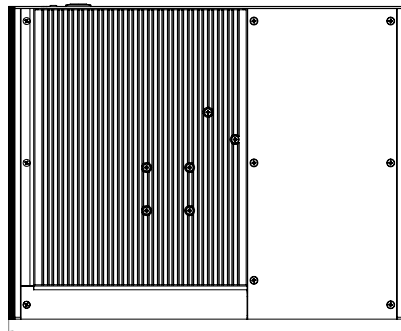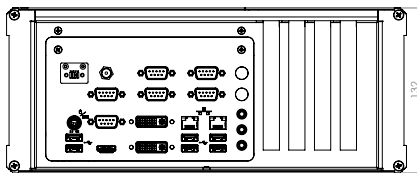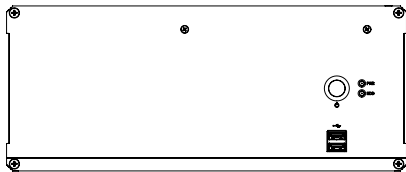

Impact-E 400

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

Specifications

| | | | |
|-------------------------|--|-------------------------------------|---|
| Hardware specifications | CPU: Intel® iCore™ i5-3610ME Main memory: 2GB SODIMM DDR3 1333MHz (max: 16GB 1600MHz) Chipset: Intel® QM77 PCH LAN: Dual integrated 10/100/1000 network connection (WG82579LM with iAMT 8.0 and WG82574L) | Mechanical | Design: Rugged compact embedded design Cooling: Fanless design Construction: Extruded Aluminum Colour: Black/Silver Dimension: 320 x 132 x 250 mm (W x H x D) |
| BIOS | AMI 2x32 Mbit flash memory | Environmental operation | Acoustic noise: Near silent operation Operating Temperature: 0°C to 55°C Humidity: 0 to 90% non-condensing |
| Storage | Total drive capacity:- 2 x 2.5" SATA SSD/HDD (RAID I/O) | Environmental storage | Temperature: -20°C to 70°C Humidity : 5% to 90% @ 20°C |
| System expansion | Impact-E 430 1 x PCIe x16 rev 3.0 1 x PCIe x1 rev 2.0 (physical x16) 2 x PCI Impact-E 423 1 x PCIe x16 rev 3.0 3 x PCI 2 x mPCIe half length (PCIe and USB signal) | Electromagnetic compatibility (EMC) | EN 55022 Class A EN 55024 Electrostatic discharge immunity test (EN61000-4-2) Enclosure port ±4kV Contact, applied to enclosure port ±8kV Air, applied to enclosure port Radiated, radio-frequency, electromagnetic field immunity test (EN61000-4-3) Enclosure port 80-1000MHz, 10 V/m (RMS, no modulation) 80% Modulation with 1kHz Sine wave Electrical fast transient/burst immunity test (EN61000-4-4) Power port AC, inc. protective earth Severity ±0.5kV Immunity to conducted disturbances induced by radio frequency fields (EN61000-4-6) Power port AC, inc. protective earth via CDN M3 0.15-80MHz, 10 V/m (no modulation) 80% Modulation with 1kHz Sine wave, applied via CDN Amplicon own a fully equipped EMC facility and can provide many additional tests to meet your requirements. |
| Supported O/S | Microsoft Desktop: Windows XP, 7, 8 (x86 and x64) Microsoft Server: Server 2008 R2, Server 2012 Linux: Ubuntu 13.10 (x86 and x64) Other operating systems are available | | |
| General Interfaces | 4 x USB 3.0 ports, 4 x USB 2.0 2 x RJ45 LAN 1 x DVI-I, 1 x DVI-D, 1 x HDMI (1920 x 1200) 1 x PS/2 (keyboard and Mouse) 6 x DB9 COM ports (2 x RS232/422/485, 4 x RS232) 1 x Line-In/Surround, 1 x Line Out, 1 x MIC In/Center + Subwoofer | | |
| Display | Max resolution: 1920 x 1200 (per port) Supports Direct X11 and OpenGL 3.0 | | |
| LED and switches | Power (PC on) LED Hard disk access LED ATX system control switch, system reset | | |
| Power | DC input voltage +12-25VDC | | |

Rear I/O plate

